




Freedom of space.
Balcony and sliding doors
made from PVC



Energy-efficient Windows

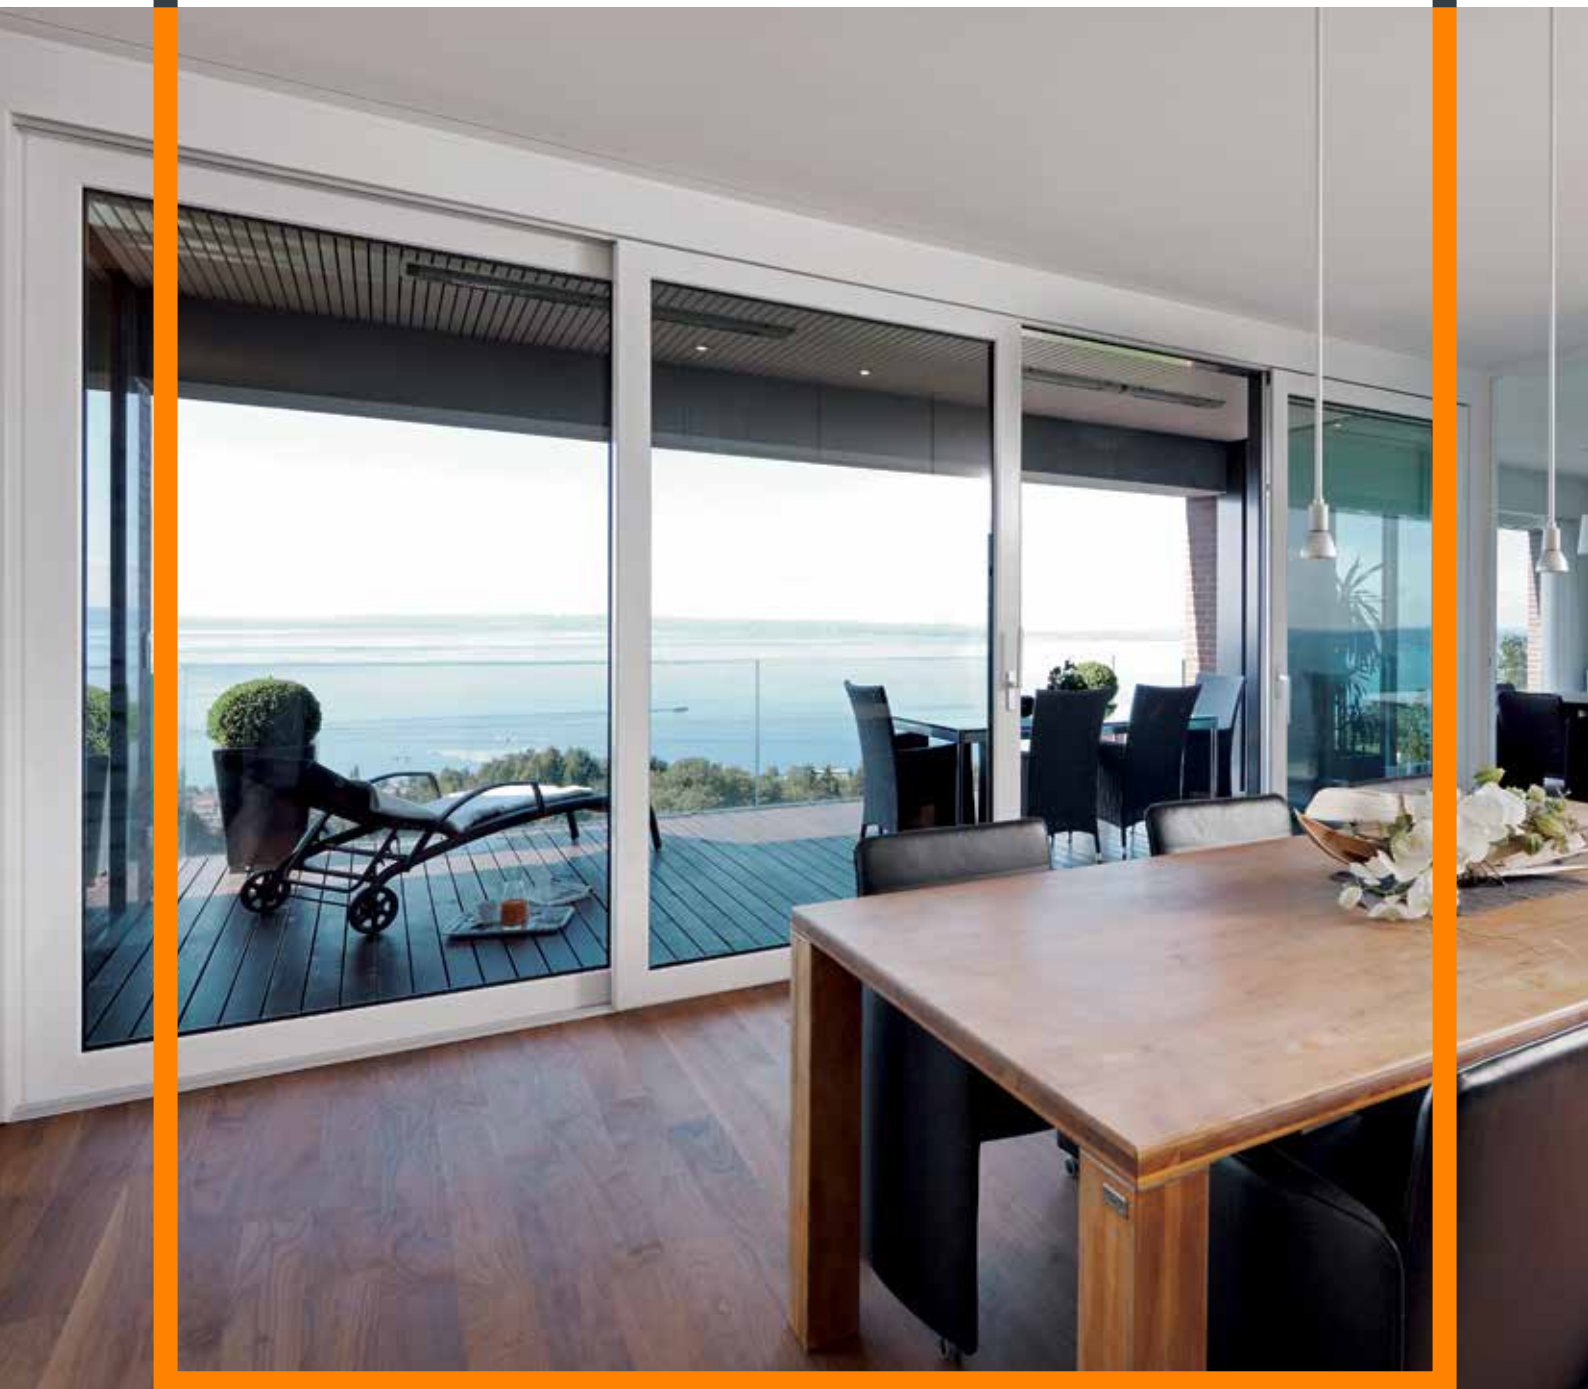

Freedom of space.

Balcony and sliding doors made from PVC


The maximum amount of daylight will bring you into a better quality of living. Thanks to a large surface of windows, you will feel like you are living in the middle of the space that surrounds you - whether it's a green garden or a vibrant metropolis. The wide range of construction possibilities is diversified by modern architecture.

Tilt and slide PSK doors made from PVC

The perfect solution when you want to save space. The PSK doors do not have window sashes which, when opened, take up space in the room. Thanks to the narrow installation depth, they enable optimal use of space and are suitable for use both during renovation works and during new installation.

Attractive advantages:

- 1 Narrow installation depth**
Low space consumption inside the room during use.
- 2 PSK door**
Convenient operation thanks to parallel movement of the leaf. Possible tilt opening.
- 3 Large glazing**
Guarantee a bright, light-filled room. Leaf width up to 1900 mm, leaf weight up to 200 kg.

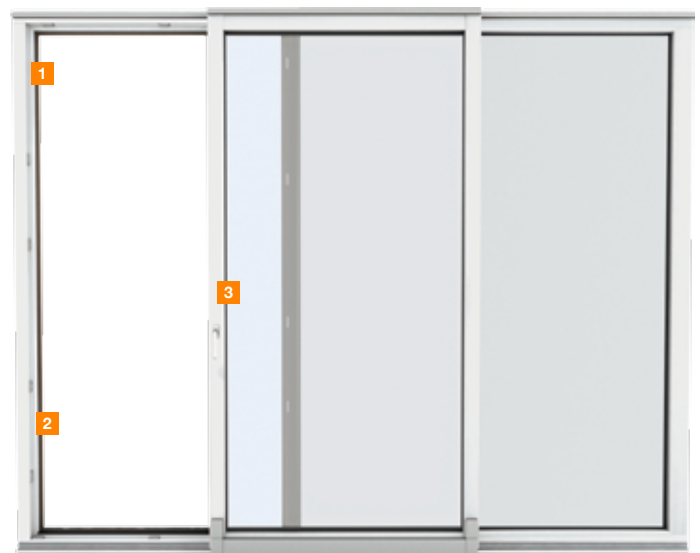

Do you know that...

The PSK doors save a lot of space and in addition to that, they have tilt opening? Thanks to a shallow installation, they are ideal for renovation.




HST lift and slide door



Attractive advantages:


- **Form and function:** Illuminated rooms and solar power thanks to very narrow frames.
- **Convenient service:** Thanks to high-quality fittings, closing and opening is smooth and easy as piece of cake.
- **No barriers:** Low aluminum threshold system in the standard version.
- **Safety and certainty:** Special safety glass and hardware (up to RC 2 safety class) will protect your home effectively.

Types of opening




Scheme A³⁾

- 1 sliding sash (right or left)
- 1 permanent glazing




Scheme C³⁾

- 2 sliding sashes (right and left) without a bar
- 2 permanent glazing




Scheme G

- 1 sliding sash (right or left)
- 2 permanent glazing



Scheme K

- 2 sliding sashes
- 1 permanent glazing



Scheme H

- Permanent glazing

Convincing values

	HST doors 88	HST doors 76	PSK doors
Heat transfer coefficient¹⁾	Uf 1.2 W/m ² K (for the frame) up to 0.74 W/m ² K	Uf 1.0 W/m ² K (for the frame) up to 0.73 W/m ² K	Uf up to 0.76 W/m ² K (for the frame)
Noise protection¹⁾	Rw 45dB value	Rw 41dB value	Rw 42dB value
Resistance to wind²⁾	up to C2/B3 class according to EN 12210	up to B3 class according to EN 12210	up to B3/C3 class according to EN12210
Waterproofness²⁾	9A class according to EN 12208	9A class according to EN 12208	up to 8A class according to EN 12208
Air permeability²⁾	up to class 4 according to EN 12207	up to class 4 according to EN 12207	up to class 4 according to EN 12207
Safety	Basic protection, RC 1 N, RC 2 N, RC 2	Basic protection, RC 1 N, RC 2 N, RC 2	Basic protection

¹⁾ windows technical parametres

²⁾ scheme A (2.37 x 2.37 m)

³⁾ these diagrams are only possible for sliding, with tilt opening parallel doors.



NFALLY JARJU, AUGUST-LAEMMLE-STR.
2, D-72127 KUSTERDINGEN, GERMANY.
TEL: +49 172 7469 114, EMAIL:
nfallyjarju@gmail.com

Authorized distributor: Nfally Jarju

